

鎮江至誠物資有限公司

ZHENJIANG GREAT HONEST INC.

ZHENJIANG GREAT HONEST INC.


Feed Pellet Machine

The feed pellet machine is widely used in aquaculture, livestock farms, poultry farms, individual farmers or large, medium and small feed processing plants. Feed pellet machine is mainly suitable for raising rabbits, fish, ducks, chickens, shrimps, pigs, deer, cattle, sheep, etc.

Corn can be added directly without crushing, the feed has smooth surface and moderate hardness. The temperature is low during processing, so it can better maintain the nutritional content of raw materials.







Technical Parameters

Model	Capacity (kg/h)	Power Motor / Engine / Gasoline	Weight (kg)	Packing size (mm)
9KL-125 (2)	25-50	4kw / 8hp / 8hp	48	1110×780×290
9KL-150 (2)	50-100	4kw / 8hp / 8hp	50	1110×790×305
9KL-160 (3)	100-150	4.5kw / 8hp / 8hp	52	1110×805×325
9KL-180 (4)	100-200	4.5kw / 8hp / 8hp	55	1110×805×325
9KL-210 (3)	200-300	7.5kw / 12hp / ---	100	1360×1010×365
9KL-230 (3, 4)	300-400	11kw / 15hp / ---	120	1360×1110×440
9KL-260 (3, 4)	400-500	15kw / 25hp / ---	140	1570×1200×455
9KL-280 (4)	500-800	18.5kw /28hp / ---	160	1600×1260×480
9KL-300 (4)	600-1000	22kw / 30hp / ---	258	1700×1420×510
9KL-400 (4)	1000-2000	37kw / --- / ---	506	1950×1825×615
9KL-500 (4)	2000-3000	55kw / --- / ---	650	1800×800×1400
9KL-600 (4)	3000-4000	75kw / --- / ---	1100	2300×840×1400

Note:
The product is continuously improved, if the technical parameter is change without notice.
The weight is not included electric motor or diesel engine.

ADD:11F, 98 WEST ZHONGSHAN RD., ZHENJIANG, JIANGSU, CHINA POST CODE: 212004
TEL.: +86-511- 85898001 (10 line) WeChat:13906104790
HTTP://www.ZJGHI .com E-mail:Jacky@zjghi.com

ZHENJIANG GREAT HONEST INC.

Feed pellet production line

The main steps of feed pellets production line include raw material crushing, mixing, pelletizing, cooling and packaging. Each step is connected by elevator or conveyor belt, so as to realize automation and improve production efficiency.





Simple Feed Production Line

Production line capacity		100kg/h	300kg/h	500kg/h
Crusher	Model	M350	M400	M420
	Power	4.5kw (220V/50HZ) Two phase motor	5.5kw (220V/50HZ) Three phase motor	7.5kw (380V/50HZ) Three phase motor
	Weight	75kg	200kg	200kg
	Packing	980*630*930mm	1550*650*1110mm	1550*650*1110mm
Mixer	Model	M50	M150	M200
	Power	3.0kw (220V/50HZ) Two phase motor	3.0kw (220V/50HZ) Two phase motor	3.0kw (220V/50HZ) Two phase motor
	Weight	48kg	103kg	110kg
	Packing	600*630*1150mm	970*970*1190mm	1040*1040*1200mm
Elevator	Model	M140	M165	M165
	Length	2m	2.5m	3m
	Power	3.0kw (220V/50HZ) Two phase motor	4.5kw (220V/50HZ) Two phase motor	4.5kw (220V/50HZ) Two phase motor
	Weight	88kg	88kg	180kg
	Packing	2050*320*260mm	1850*680*550mm	3120*690*535mm
Pellet machine model		9KL-150 9KL-160 9KL-180	9KL-210 9KL-230	9KL-260
				

ADD:11F, 98 WEST ZHONGSHAN RD., ZHENJIANG, JIANGSU, CHINA POST CODE: 212004
TEL.: +86-511- 85898001 (10 line) WeChat:13906104790
HTTP://www.ZJGHI .com E-mail:Jacky@zjghi.com

ZHENJIANG GREAT HONEST INC.


Feed pellet production line

Production line capacity		1000kg/h	2000kg/h
Crusher	Model	M420	M500
	Power	11kw (380V/50HZ) Three phase motor	15kw (380V/50HZ) Three phase motor
	Weight	260kg	300kg
	Packing	1175*750*900mm	1550*820*1100mm
Mixer	Model	M300	M2000
	Power	3.0kw (220V/50HZ) Two phase motor	11kw (380V/50HZ) Three phase motor
	Weight	200kg	630kg
	Packing	1260*1260*1330mm	2850*1100*1900mm
Elevator	Model	M219	M219
	Length	3m	6m
	Power	4.5kw (220V/50HZ) Two phase motor	4.5kw (220V/50HZ) Two phase motor
	Weight	180kg	240kg
	Packing	3120*690*535mm	3120*690*535mm
Pellet machine model		9KL-300	9KL-400
			
Conveyor I	Power	2.2kw (220V/50HZ) Two phase motor	3.0kw (220V/50HZ) Two phase motor
	Weight	180kg	400kg
	Packing	3590*670*860mm	6500*1200*4200mm
Cooler	Power	2.2kw (220V/50HZ) Two phase motor	4.0kw (220V/50HZ) Two phase motor
	Weight	330kg	800kg
	Packing	2540*1190*1960mm	2100*3200*3600

ADD:11F, 98 WEST ZHONGSHAN RD., ZHENJIANG, JIANGSU, CHINA POST CODE: 212004
TEL.: +86-511- 85898001 (10 line) WeChat:13906104790
HTTP://www.ZJGHI .com E-mail:Jacky@zjghi.com

ZHENJIANG GREAT HONEST INC.

Feed pellet production line

Conveyor II	Power	/	3.0kw (220V/50HZ) Two phase motor
	Weight	/	350kg
	Packing	/	4700*1200*3250mm
Packaging machine	Power	/	4.0kw (220V/50HZ) Two phase motor
	Weight	/	150kg
	Packing	/	2400*1000*1900mm
Power distribution box		Well matched	Well matched
			

Biomass Wood Pellet Machine



Technical Parameter

Model	Power	Capacity	Weight	Packing size
B-300	22kw	300kg/h	600kg	1570×640×1500mm
B-400	37kw	500kg/h	1000kg	1800×680×1850mm

ADD:11F, 98 WEST ZHONGSHAN RD., ZHENJIANG, JIANGSU, CHINA POST CODE: 212004
TEL.: +86-511- 85898001 (10 line) WeChat:13906104790
HTTP://www.ZJGHI .com E-mail:Jacky@zjghi.com

ZHENJIANG GREAT HONEST INC.

Fish Feed Floating Pellet Machine

This machine is a specialized feed processing equipment that primarily processes raw materials such as corn, soybean meal, and wheat bran into extruded pellet feed through high temperature, high pressure, shearing, and extrusion.

It can effectively enhance the digestion and absorption rate of feed, eliminate harmful microorganisms in raw materials, improve the palatability and storage stability of feed, and is suitable for large-scale production of various compound feeds for aquatic products, livestock, poultry, pets, and other applications.







Technical parameters

Model	YH-40	YH-60	YH-80	YH-100
Main Motor Power	5.5kw	15kw	22kw	37kw
Voltage	220/380V	380V	380V	380V
Feeding Motor Power	0.4kw	0.4kw	0.4kw	0.55kw
Cutting Motor Power	0.4kw	0.4kw	0.4kw	1.1kw
Capacity	40-60kg/h	120-150kg/h	250-300kg/h	400-500kg/h
Weight	290kg	400kg	700kg	900kg
Dimension (working)	1.5*1.1*1.1m	1.54*1.3*1.3m	2.1*1.5*1.35m	2.1*1.5*1.3m

Model	YH-120	YH-150	YH-160
Main Motor Power	55kw	75kw	90kw
Voltage	380V	380V	380V
Feeding Motor Power	0.75kw	1.1kw	2.2kw
Cutting Motor Power	2.2kw	2.2kw	2.2kw
Capacity	600-800kg/h	900-1000kg/h	1200-1500kg/h
Weight	1700kg	2000kg	2300kg
Dimension (working)	2.4*1.95*1.6m	2.8*2.4*1.8m	3.0*2.8*2.0m

ADD:11F, 98 WEST ZHONGSHAN RD., ZHENJIANG, JIANGSU, CHINA POST CODE: 212004
TEL.: +86-511- 85898001 (10 line) WeChat:13906104790
HTTP://www.ZJGHI .com E-mail:Jacky@zjghi.com

ZHENJIANG GREAT HONEST INC.

Straw cutting and rubbing machine

Straw cutting and rubbing machine are mainly used to cut and grind corn stalks, bean stalks, forage grass, other crop stalks, as well as corn, soybeans and other cereals. The finished product is finer, producing feed for cattle, sheep, horse, deer and rabbit and so on, mostly for small and medium farms or household use. It can also be used for front end production of feed pellet.







Technical Parameters

Model	Capacity (kg/h)	Power (kw / HP)	Voltage (V)	Weight (kg)	Working size (mm)	Packing size (mm)
9ZR-1.0	600	2.2 / 8	220	42	690x460x670	720x490x770
9ZR-2.8	2,800	3.0 / 8	220/380	45	1530×470×750	1550×500×850
9ZR-3.8	3,800	3.0 / 8	220/380	60	1670×470×800	1700×500×900
9ZR-4.8	4,800	4.0 / 12	220/380	80	1720×550×900	1750×580×1000
9ZR-5.8	5,800	4.5 / 12	380	110	1870×650×1100	1900×680×1200
9ZR-6.8	6,800	7.5 / 15	380	160	2370×700×980	2400×740×1080

Packing: Bare packaging or wooden case.
Noted: The weight is not included electric motor or diesel engine.


ADD:11F, 98 WEST ZHONGSHAN RD., ZHENJIANG, JIANGSU, CHINA POST CODE: 212004
TEL.: +86-511- 85898001 (10 line) WeChat:13906104790
HTTP://www.ZJGHI .com E-mail:Jacky@zjghi.com

ZHENJIANG GREAT HONEST INC.

FFC Series Maize Crushing/Grinding Machine

FFC series are very popular because of its compact structure, easy operation and maintenance, good grinding function, low power consumption and little volume, so it is widely used to grinding the corn, wheat, rice, grain, jowar, bean, sweet potato and etc. Therefore, it is the appropriate assistant equipment for the culturist, farm and rice–powder processing factory.











Technique parameters

Model	Power	Net weight	Capacity	Shaft speed	Sieve hole size
FFC-15	1.1kw	23kg	55-80kg/h	9000-9200r/min	0.6 ~ 1.2 ~ 3.5mm
FFC-23	3kw	73kg	80-190kg/h	5800-6000r/min	0.6 ~ 1.2 ~ 3.5mm
FFC-37	7.5kw	188kg	210-450kg/h	3600-3800r/min	0.6 ~ 1.2 ~ 3.5mm
FFC-45	11kw	264kg	280-650kg/h	3000-3200r/min	0.6 ~ 1.2 ~ 3.5mm


Grains Flour


Corn Flour


Rice Flour

ADD:11F, 98 WEST ZHONGSHAN RD., ZHENJIANG, JIANGSU, CHINA POST CODE: 212004
TEL.: +86–511– 85898001 (10 line) WeChat:13906104790
HTTP://www.ZJGHI .com E–mail:Jacky@zjghi.com

ZHENJIANG GREAT HONEST INC.

9FC Series Crushing/Grinding Machine


9FC series are upgraded from FFC series machine. It has lower requirements for the volume and moisture content of raw materials.

The newly added T–shaped teeth inside enhance the crushing capability of this machine, resulting in higher productivity and reduced susceptibility to blockage.

The integrated design of the fan and the shaker within the machine also makes it more convenient to use in high–volume production.





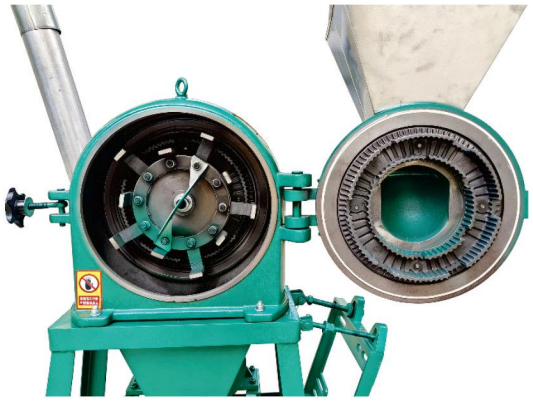

Technical parameters

Model	Power	Net weight	Capacity	Shaft speed	Sieve hole size
9FC-320	11kw / 15hp	160kg	500-600kg/h	4600r/min	0.2 ~ 10mm
9FC-360	15kw / 25hp	175kg	600-800kg/h	4200r/min	0.2 ~ 10mm

ADD:11F, 98 WEST ZHONGSHAN RD., ZHENJIANG, JIANGSU, CHINA POST CODE: 212004
TEL.: +86–511– 85898001 (10 line) WeChat:13906104790
HTTP://www.ZJGHI .com E–mail:Jacky@zjghi.com

ZHENJIANG GREAT HONEST INC.

Tomato Grinder Machine

This machine is used to crush fresh tomatoes into pulp, and can also handle potatoes, fruits, and vegetables. It is suitable for families or small workshops to make tomato sauce and tomato juice.



Technical parameters

Model	6N-8
Motor Power	2.2kw
Capacity	500kg/h
Main shaft speed	5500r/min
Net weight	65kg

Vegetable crusher

This machine is suitable for shredding various vegetables, fruits, and potatoes, and producing feed for chickens, ducks, cows, and sheep.







Technical parameters

Model	M350*400
Power	0.55kw
Capacity	1000kg/h
Net weight	19kg
Dimension	400*350*800mm

ADD:11F, 98 WEST ZHONGSHAN RD., ZHENJIANG, JIANGSU, CHINA POST CODE: 212004
TEL.: +86-511- 85898001 (10 line) WeChat:13906104790
HTTP://www.ZJGHI .com E-mail:Jacky@zjghi.com

ZHENJIANG GREAT HONEST INC.

Large stacked egg chicken cage

The ladder cage can be equipped with automated equipment such as a manure cleaning machine, an egg picking machine (platform egg picking machine flip type egg picking machine), a feeding machine (battery feeding truck), etc.









Technical parameters

Single cage size	120*120 (floor height 650)
Material	Hot-dip galvanized wire, post hot dip (optional)
Feed trough	Galvanized feed trough (V-shaped feed trough)
Capacity	8 per door, 4 doors/floor can made into four, five and multiple layers
Can be equipped with automatic feeder, automatic egg picker, automatic manure cleaner	

ADD:11F, 98 WEST ZHONGSHAN RD., ZHENJIANG, JIANGSU, CHINA POST CODE: 212004
TEL.: +86-511- 85898001 (10 line) WeChat:13906104790
HTTP://www.ZJGHI .com E-mail:Jacky@zjghi.com

ZHENJIANG GREAT HONEST INC.

Rice mill machine

Separating–type Iron Rice Mill is mainly used for husking and polishing paddy into polished rice with high purity, and automatically separating the polished rice from fine bran, broken rice and un–milled paddy · by rice–bran separating mechanism without using any sieve. The coarse bran can be re–milled automatically and turned into fine which may be used as refined feed.


This machine has the features of compact structure, convenient and reliable operation, easy installation fine performance, etc. It is one of the rice processing machines used widely in the country sides and towns.



Model 400–1



Model 6NF–9

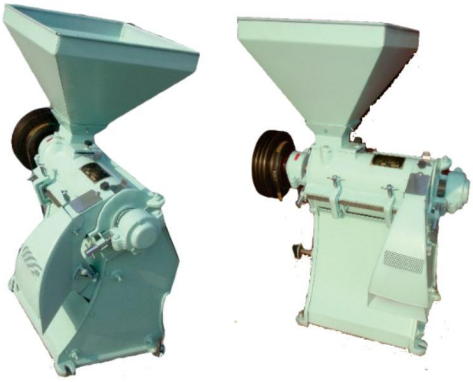

Model LN632F

Technical parameters

Model	400–1	6NF–9	LN632F
Capacity (kg/h)	700–1000	700–1000	1000
Rate of polished rice	⩾ 69%	⩾ 69%	⩾ 92%
Rate of broken rice	⩽ 26%	⩽ 26%	⩽ 15%
Bran in rice	⩽ 0.2%	⩽ 0.2%	⩽ 0.2%
Power (HP)	10–12	10–12	13–15

Packing with wooden case

– Model 400–1: 248 pcs/20’ FCL (4 pcs in bulk/case).

– Model 6NF–9: 186 pcs/20’ FCL (3 pcs in bulk/case).


– Model LN632F : 180 pcs/20’ FCL (2 pcs in bulk/case).

ADD:11F, 98 WEST ZHONGSHAN RD., ZHENJIANG, JIANGSU, CHINA POST CODE: 212004
TEL.: +86–511– 85898001 (10 line) WeChat:13906104790
HTTP://www.ZJGHI .com E–mail:Jacky@zjghi.com

ZHENJIANG GREAT HONEST INC.

Mini Combine Rice mill machine

Combine rice mill, this model is a comprehensive equipment for paddy-processing. Paddy first goes into machine through vibrating sieve and magnet device , and then passes rubber-roller for hulling. Alter air blowing and air jetting to the milling room , the paddy finishes the process of husking and milling in succession. Then husk , chaff , runtish paddy , and white rice are pushed out of machine respectively. This machine adopts all the advantages of other types , and has a comprehensive layout rational design, compact structure and little noise in operation. It is easy to operate with less power consumption and high productivity. The model can produce white rice with high purity above National standard 1, and with less chaff containing and less broken. So it is indeed a combined rice mill of a new generation.

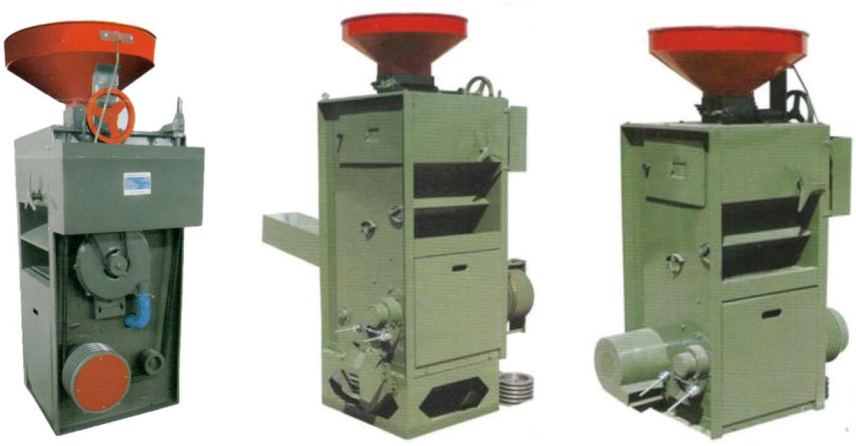

Technical parameters

Model	Power (kw)	Capacity (kg/h)	Rubber roller	Rate of husking	Rate of broken rice
SB-5	5.5	300-400	2.5”	⩾ 95%	⩽ 5%
SB-10D	11	800-1100	4”	⩾ 95%	⩽ 5%
SB-30	15	1100-1500	6”	⩾ 95%	⩽ 5%
SB-50	22	1800-2300	10”	⩾ 95%	⩽5%

Packing with wooden cases

– Model SB–5: 36 pcs/20’ FCL.
– Model SB–10: 24 pcs/20’ FCL.
– Model SB–30: 18 pcs/20’ FCL.
– Model SB–50: 12 pcs/20’ FCL.

ADD:11F, 98 WEST ZHONGSHAN RD., ZHENJIANG, JIANGSU, CHINA POST CODE: 212004
TEL.: +86–511– 85898001 (10 line) WeChat:13906104790
HTTP://www.ZJGHI .com E–mail:Jacky@zjghi.com

ZHENJIANG GREAT HONEST INC.

Rice and Coffee hulling machine

This machine is widely used for hulling rice and coffee

This machine needs no treatment of manpower windmill and sifter. It not only remains the advantage of our traditional shell-open machine but also gets rid of the waste, shell and sand at once through the chaff tube. The machine is in good performance, high efficiency and less energy. It is convenient for operating and maintenance with its tightly constructure. The biggest advantage is that the rough chaff can be back automatically for being grinded to thin chaff so that the environment pollution is reduced.



Technical parameters

Model	6NF–13.2
Capacity	900–1100 Kgs/H
Rate of polished rice	⩾ 69%
Rate of broken rice	⩽ 35%
Bran in rice	⩽ 0.15%
Power (Motor or Diesel engine)	11 kw / 15 HP

Packing: In wooden cases, 60 pieces /20'FCL

ADD:11F, 98 WEST ZHONGSHAN RD., ZHENJIANG, JIANGSU, CHINA POST CODE: 212004
TEL.: +86–511– 85898001 (10 line) WeChat:13906104790
HTTP://www.ZJGHI .com E–mail:Jacky@zjghi.com

ZHENJIANG GREAT HONEST INC.

N-series and NX-series Double jet-air Rice mill


This machine adopts double jet-air design, integrating husking, whitening, and temperature control, achieving one-stop processing from paddy to high-quality rice. It is suitable for the production needs of households, cooperatives, and grain processing factories.

Product advantages

1. Equipped with two sets of fan devices for spraying and suction, it doesn't have dust overflowing, and avoid the high temperature caused by friction during production.
2. The finished rice is smooth and crystal clear, with less broken rice, low bran content.
3. Equipped with a bran collection device and the bran can be used as feed.



N-series

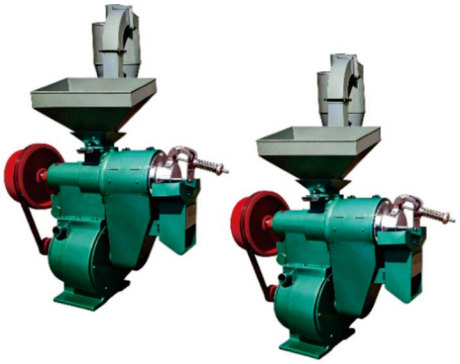

NX-110



NX-110F

Technical Parameters

Model	N110	N150	N200	NX-110	NX-110F
Capacity (kg/h)	1100- 1200	1500- 1600	1800- 2000	1000- 1200	1100- 1200
Shaft speed (r/m)	750- 850	800- 900	850- 900	800- 850	850- 950
Power (kw)	11- 15	18.5	22	15	15
Net weight (kg)	220	330	390	275	210
Conventional power: Electric Motor 380V/50HZ					

Recommend using an electric motor. Good stability performance during work.

ADD:11F, 98 WEST ZHONGSHAN RD., ZHENJIANG, JIANGSU, CHINA POST CODE: 212004
TEL.: +86-511- 85898001 (10 line) WeChat:13906104790
HTTP://www.ZJGHI .com E-mail:Jacky@zjghi.com

ZHENJIANG GREAT HONEST INC.

Combine harvester



Technical parameters

Machine Type	Combine harvester
Model	4LZ-6.0C
Engine Structure mode	Vertical, inline, water-cooled,4 strokes
Engine Rated power	70kw
Engine Rated speed	2400r/min
Dimension	5450×2350×2700mm
Weight of the whole machine	3200kg
Cutting width	1880mm
Feed rate	6.0kg/s
Minimum ground clearance	300mm min
Theoretical travel speed	2.15- 5.28km/h
Capacity	0.2- 0.4 hm^2/h
Fuel consumption	21- 27 kg/hm^2
Type of cutter	Standard II
Reel Diameter	900mm
Threshing cylinder type	Axial-flow
Threshing cylinder dimension	f 550×1840mm
Fan Diameter	420mm
Track (pitch × Number of teeth × width)	90mm× 51× 450mm
Distance between tracks	1000mm
Unloading	360-degree auger unloading

Advantages:

1. Compact structure, excellent performance, Low ground pressure, high performance in wet or mud land.
2. High threshing ability, low broken rate. Low lost rate.
3. Thorough clearance with double shakers for re-threshing.
4. Famous brand engine with large power and stable performance.

ADD:11F, 98 WEST ZHONGSHAN RD., ZHENJIANG, JIANGSU, CHINA POST CODE: 212004
TEL.: +86–511– 85898001 (10 line) WeChat:13906104790
HTTP://www.ZJGHI .com E–mail:Jacky@zjghi.com

ZHENJIANG GREAT HONEST INC.

Thresher

Mainly used for threshing wheat and rice. The combined operation of separation, air selection, and screening is adopted, which can remove and separate wheat grains, wheat residue, wheat bran, and wheat straw in one go. This product has the characteristics of high purification rate and low crushing rate, which can shorten the wheat harvest period and greatly save labor. It is widely used in wheat and rice production areas such as rural areas, plains, semi mountainous areas, and hills, and is highly welcomed by users.



5TD–90



5TD–125



5TZ–100A

Technical parameters

Model	5TD-90	5TD-125	5TZ-100A
Capacity(kg/h)	800-1000	1000-1500	1200-1500
Shaft speed(r/m)	1040-1100	1040-1100	1100
Fan speed(r/m)	1040-1100	2500 (double fan)	2500 (double fan)
Clean system	Fan and Oscillating sieve		
Threshing Performance	⩾ 99%		
Total loss	⩽ 1%	⩽ 3%	⩽ 2%
Broken grain	⩽ 0.5%	⩽ 1.5%	⩽ 1.5%
Working dimension(mm)	3100*1700*1500	2500*1770*1550	2011*2218*1945
Suggesting Power (HP)	12-15	22	12-15
Weight (excluding power)	350kg	480kg	450kg

Noted:

1)Walking chassis / frame: optional

2)Two big wheel tire specifications: 400–12 or 650–16 (optional)

3)Power: Electric motor or Diesel Engine (optional)

ADD:11F, 98 WEST ZHONGSHAN RD., ZHENJIANG, JIANGSU, CHINA POST CODE: 212004
TEL.: +86–511– 85898001 (10 line) WeChat:13906104790
HTTP://www.ZJGHI .com E–mail:Jacky@zjghi.com

ZHENJIANG GREAT HONEST INC.

Walking Tractor / Power Tiller

The walk–behind tractor is suitable for small plots of farmland and can perform various agricultural tasks such as plowing, rotary tilling, sowing, harvesting, and trenching. With its simple structure and user–friendly operation, it is ideal for diverse farming activities on small–scale land.

The walk–behind tractor typically features the following characteristics:

Simple Structure: Composed of an engine, chassis, and electrical system, it is easy to maintain and operate.

Moderate Power: Designed to meet the needs of small plots while delivering sufficient power.

Wide Applicability: Suitable for both paddy and dry fields in plains, mountainous regions, and hilly areas.

Lightweight Maneuverability: Offers flexible operation and adapts to various terrains and farming requirements.







Chassis parameters

Model		101	121	151
Type		Traction & Driving	Traction & Driving	Traction & Driving
Rated Traction		1700N	1700N	2400N
Type of clutch		Sing / double friction disc of constant conjunction Two slot / Three slot double disc / Three slot single disc	Sing / double friction disc of constant conjunction Two slot / Three slot double disc / Three slot single disc	Double friction disc of constant conjunction
Type Of Brake		Cricoid, Inside, Expansion	Cricoid, Inside, Expansion	Cricoid, Inside, Expansion
Type of steering Gear		Meshing sleeve	Meshing sleeve	Meshing sleeve
Dimensions (L x W x H)		2170×890×1150 mm	2170×890×1150 mm	2680×960×1250 mm
Min. Ground Distance		210 mm	210 mm	185 mm
Wheel base		640 - 680 mm	640 - 1160 mm	580 -8 00 mm
Weight		133 kgs	138 kgs	185 kgs
Tire Model		6.00-12	6.00-12/600-14	6.00-12
Tire Pressure	Field Work	80~200(0.8~2.0kgf/cm^2)	80~200(0.8~2.0kgf/cm^2)	80~200(0.8~2.0kgf/cm^2)
	Transportation Work	140~200(1.4~2.0kgf/cm^2)	140~200(1.4~2.0kgf/cm^2)	140~200(1.4~2.0kgf/cm^2)
Triangle belt		B1800	B1830	B1880

ADD:11F, 98 WEST ZHONGSHAN RD., ZHENJIANG, JIANGSU, CHINA POST CODE: 212004
TEL.: +86–511– 85898001 (10 line) WeChat:13906104790
HTTP://www.ZJGHI .com E–mail:Jacky@zjghi.com


ZHENJIANG GREAT HONEST INC.

Walking Tractor / Power Tiller





OPTIONAL ACCESSORIES



		
750-16 RUBBER WHEEL	IRON WHEEL	RAKE
		
SINGLE PLOUGH	DISC PLOUGH-2	DISC PLOUGH-3

Products tehcnical spesfication			
Model		61 Plus	
Engine		8.5~15.5 hp Diesel engine	
Clutch type		Dry type multi disc clutch	
Steering system		Compress steering type	
Brake system		Small-scale braking	
Transmission system		Fixed sliding positioning	
Tractor speed (Engine speed: 2400 rpm, rubber wheel size 750-16, length: 600mm)		Low gear 1st gear	4.86 km/h
		Mid gear 2nd gear	9.26 km/h
		High gear 3rd gear	26.5 km/h
		Backward gear	3.8 km/h
Axle		Type	Hexagonal axle
		Size	44.5mm
Rubber tire		Type	Special tire for tractor
		Size	750-16
		Pressure	46 pound/square. inch
Diameter of iron wheel		800 mm	
Lubricant in transmission	Type	SSAE No.90	
	Capacity	5.5 – 6.0 L	
Tractor weight (excluding the engine)		185 kgs (with 750-16 rubber wheels)	
		234 kgs (with iron wheels)	

ADD:11F, 98 WEST ZHONGSHAN RD., ZHENJIANG, JIANGSU, CHINA POST CODE: 212004
TEL.: +86–511– 85898001 (10 line) WeChat:13906104790
HTTP://www.ZJGHI .com E–mail:Jacky@zjghi.com

ZHENJIANG GREAT HONEST INC.

Farm tools of Walking Tractor

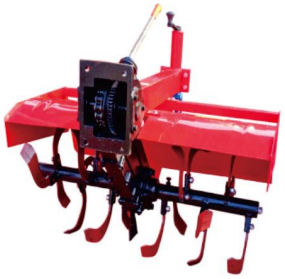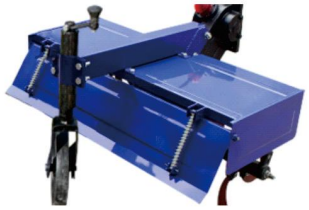Picture	Model	Rotary tiller			
		Width	Gearbox form	Number of blades	Weight
	101 / 121	80 cm	Chain	16	51 kgs
	101 / 121	90 cm	Chain	18	52 kgs
	101 / 121	100 cm	Chain	20	53 kgs
	101 / 121	110 cm	Chain	22	54 kgs
	101 / 121	120 cm	Chain	24	55 kgs
	101 / 121	80 cm	Gear	16	55 kgs
	101 / 121	90 cm	Gear	18	56 kgs
	101 / 121	100 cm	Gear	20	57 kgs
	101 / 121	110 cm	Gear	22	58 kgs
	101 / 121	120 cm	Gear	24	59 kgs



ADD:11F, 98 WEST ZHONGSHAN RD., ZHENJIANG, JIANGSU, CHINA POST CODE: 212004
TEL.: +86-511- 85898001 (10 line) WeChat:13906104790
HTTP://www.ZJGHI .com E-mail:Jacky@zjghi.com

ZHENJIANG GREAT HONEST INC.


Farm tools of Walking Tractor

Picture	Model	Steel wheel		
		Diameter	Width	Weight
	Anti-skid steel wheel	65 cm	10 cm	
	Lugged Paddy wheel	73 cm	28 cm	32 kgs
	Double circle wheel	65 cm	26 cm	26 kgs
	Double circle wheel	73 cm	26 cm	35.5 kgs
	Three Circle Paddy Wheel	60 cm	40 cm	31 kgs
	Wide Lugged Paddy Wheel	75 cm	45 cm	

Note: When the 151 model Rotary tiller with a width of 90cm and more than 24 blades is used together with Steel wheel, a connection box must be installed to connect the walking tractor and rotary tiller.



Connection box

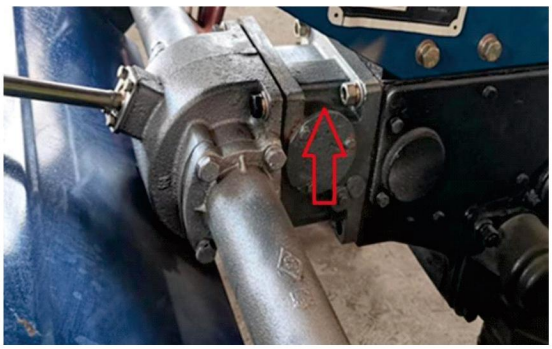

Connection diagram

ADD:11F, 98 WEST ZHONGSHAN RD., ZHENJIANG, JIANGSU, CHINA POST CODE: 212004
TEL.: +86-511- 85898001 (10 line) WeChat:13906104790
HTTP://www.ZJGHI .com E-mail:Jacky@zjghi.com

ZHENJIANG GREAT HONEST INC.

Farm tools of Walking Tractor

Plow (Matching Model 101 / Model 121)



Model	Work Width	Work Depth	Working Efficiency	Weight	Size	Power
	(cm)	(cm)	(Ha /h)	(Kgs)	(cm)	(hp)
101 / 121 Single- Plow	12	14-18	0.1 - 0.2	17	91 x 22 x 66	8
101 / 121 Double-sided Plow	13	14-18	0.1 - 0.2	18	85 x 27 x 73	8
101 / 121 Double-bottom Plow	25	12-18	0.2 - 0.3	24	102 x 35 x 77	8
101 / 121 Harvest Plow	13	14-18	0.1 - 0.2	16	85 x 27 x 73	8
101 / 121 Trenching plow	13	14-18	0.1 - 0.2	17	85 x 27 x 73	8

Ditching Machine

Picture	Model	Ditching machine				
		Efficiency	Width	Depth	Power	Weight
	101	50 m/h	25 cm	25 cm	8 - 22 hp	53 kgs
	Speed adjustable	50 m/h	40 cm	40 cm	10 – 22 hp	100 kg

ADD:11F, 98 WEST ZHONGSHAN RD., ZHENJIANG, JIANGSU, CHINA POST CODE: 212004
TEL.: +86–511– 85898001 (10 line) WeChat:13906104790
HTTP://www.ZJGHI .com E–mail:Jacky@zjghi.com

ZHENJIANG GREAT HONEST INC.

Farm tools of Walking Tractor

Plow (Matching Model 151)





Model	Work Width	Work Depth	Working Efficiency	Weight	Size	Power
	(cm)	(cm)	(Ha /h)	(Kgs)	(cm)	(hp)
151 Single- Plow	12.5	14-18	0.1 - 0.2	31	77 x 30 x 75	12
151 Double-Plow	40	12-18	0.2 - 0.3	51	95.5 x 52 x 73	15
151 Double-sided Plow	13	14-18	0.1 - 0.2	38	100 x 32 x 83	12

Disc Plow




Model	Work Width	Work Depth	Working Efficiency	Weight	Size	Power
	(cm)	(cm)	(Ha /h)	(Kgs)	(cm)	(hp)
Disc Plow 1LS210Y	40	12-18	0.25 - 0.35	42	62 x 53 x 22	8-22
Disc Plow 1LS220Y	40	12-18	0.25 - 0.35	65	109 x 56 x 70	12-22

ADD:11F, 98 WEST ZHONGSHAN RD., ZHENJIANG, JIANGSU, CHINA POST CODE: 212004
TEL.: +86-511- 85898001 (10 line) WeChat:13906104790
HTTP://www.ZJGHI .com E-mail:Jacky@zjghi.com



ADD:11F, 98 WEST ZHONGSHAN RD., ZHENJIANG, JIANGSU, CHINA
POST CODE: 212004
TEL.: +86-511- 85898001 (10 line)
WeChat:13906104790
HTTP://www.ZJGHI .com
E-mail:Jacky@zjghi.com